

Assessing the Effectiveness of DL-Clustering for Energy Optimization in Wireless Sensor Networks

Shailaja S. Halli

MCA

Computer Network

Visvesvaraya Technological University

Visvesvaraya Technological University-RRC, “Jnana Sangama” Belagavi

shailachans@gmail.com

Dr Poornima G Patil

MCA

Visvesvaraya Technological University

Visvesvaraya Technological University-RRC, “Jnana Sangama” - Belagavi

poornima_g_patil@yahoo.com

Abstract: Wireless Sensor Networks (WSNs) are extensively explored for their ability to collect and monitor data across a wide range of applications. However, the sensor nodes' limited energy resources pose a substantial hurdle to prolonging the network's longevity. To address this, we propose a Deep Learning (DL)-based Clustering Model Approach for optimizing energy utilization in WSNs. The DL-Clustering method (DLC) uses sophisticated DL techniques, specifically Recurrent Neural Network (RNN), to improve energy efficiency through effective cluster formation, Cluster Head (CH) selection, and CH maintenance. Our approach increases WSN lifespan and data transmission efficiency by using DL and intelligent grouping strategies. When compared to existing approaches such as Low-Energy Adaptive Clustering Hierarchy (LEACH), Trust Integrated Congestion Aware Energy Efficient Routing (TCEER), Trust-Aware Secure Routing Protocol (TASRP), Congestion-Aware Routing Algorithm (CARA), and Security-Aware Congestion Control (SACC), DLC outperforms them in terms of energy efficiency. The results demonstrate the effectiveness of advanced deep-learning approaches in optimizing energy consumption and tackling the constraints faced by constrained energy supplies. This study highlights the ability of DL-Clustering to greatly increase energy optimization for WSNs, maximizing network potential and improving data transmission efficiency.

Keywords: Congestion, WSN, energy, Clustering, data transmission, DL

1. INTRODUCTION

WSNs have become critical in a variety of fields, including health monitoring, infrastructure defense, and surveillance of military and high-risk regions [1]. These networks are made up of many small sensor nodes that have limited energy, computation, storage, and communication bandwidth [2]. These restrictions have an impact on Quality of Service (QoS) indicators such as Packet Delivery Ratio (PDR), end-to-end delay, bandwidth utilization, and node average energy consumption [3]. Traffic congestion happens when the volume of data processed by all sensors in a region exceeds the buffer size, resulting in an unanticipated surge of data traffic and blocked network pathways [4]. This reduces the QoS due to congested routes. Network congestion causes decreased performance, packet losses, higher latency, and energy loss in Sensor Networks (SNs) [5, 6]. Congestion occurs mostly around the sink node, reducing WSN performance and potentially

resulting in energy waste, increased latency, packet loss, and other difficulties [7]. Unfair resource allocation at the node or connection level is one driver of congestion [8]. The bulk of sensor nodes suffering congestion are located near the washbasin [9].

Node-level congestion in WSNs increases power consumption and packet loss, reducing network lifespan and availability [10]. Bit error, collision, and competition all contribute to link-level congestion, which reduces PDRs at the sink node [11]. To improve throughput and packet delivery, medium access control-based congestion management techniques should be used [12]. Congestion detection involves detecting congestion in sensor nodes and notifying upstream nodes. During the rate modification or congestion mitigation phase, congestion should be decreased and a suitable data rate selected [13]. Congestion control consists of three stages: detection, notification, and mitigation [14]. Congestion detection methods for WSNs include dual buffer thresholds, weighted buffer difference, and occupied queue length, packet service time, packet interval and service time, packet drop at the sink node, queue length, and channel status [15]. Two node-level sources of congestion are mismanagement of traffic arrival and departure rates and insufficient buffer use [16].

Channel utilization identifies congestion at the link level, and congestion control approaches are critical for increasing the lifespan of WSNs [17]. Load shedding, hop-by-hop choke packets, token bucket algorithms, leaky bucket algorithms, the choke packet approach, flow control versus congestion control, and sluggish start are all examples of congestion control algorithms [18]. Congestion in WSNs necessitates a distinct traffic-focusing path from standard end-to-end schemes, particularly in single-sink WSNs [19]. Congestion can be determined by verifying the appropriate transmission rates [20]. Energy consumption is a significant barrier to WSNs, and many solutions are proposed to address it [21]. Traditional technologies such as duty cycling, load balancing, and data aggregation have been used, but they face various challenges due to the rapid increase in sensor nodes [22]. Current approaches for residual energy consumption include mobile sinks, trajectory-based data forwarding, and node-based energy supply [23]. These approaches simplify transmission but lack balanced energy between nodes. The system's key effects are user mobility and transmission rate distribution, therefore congestion is a major concern [24].

The Key contribution of the work is enumerated as

- The study presents a DLC that enhances WSN energy efficiency by utilizing RNNs.
- This model performs better in terms of energy consumption and network operational lifespan than conventional techniques such as LEACH, TCEER, TASRP, CARA, and SACC.
- To demonstrate the benefits of DL-based approaches, the paper also performs an extensive comparative analysis against well-known clustering techniques.
- To increase data transmission efficiency, the study emphasizes the possibility of combining DL techniques with clustering strategies.

The rest of the article is structured as follows section 2 reviews the existing work, section 3 discusses the analysis of congestion control, section 4 provides the evaluation of the congestion, and section 5 concludes the article.

2. RELATED WORKS

Kavitha et.al [25] offered a new Dynamic Deep Neural Network-Particle Swarm Optimization (DDNN-PSO) based on PSO, which optimizes weight parameters for improved performance. Deep Neural Network-Genetic Algorithm (DNN-GA) and DNN approaches are used to do performance analysis, which includes calculating delivery ratio, packet delay, throughput, overhead, and energy usage. However, the approach cannot be improved for better results. There has been no testing of

the suggested congestion control technique in practical WSN-based Internet of Things (IoTs) applications.

Srivastava et.al [26] The study provides a unique congestion control technique for energy-efficient transmissions, which reduces energy consumption across the network using a rate-based algorithm based on cluster routing. This approach lowers end-to-end latency, extending the network's lifespan over the simulation period. The algorithm employs hybrid K-means and Greedy best-first search algorithms, firefly optimization for high packet delivery PDRs, and Ant Colony Optimisation (ACO) for maximum throughput. However, this strategy may incur delays, raise processing burdens, and complicate dynamic network situations.

Yadav et.al [27] study suggests a strategy for avoiding congestion and improving network performance using an Efficient Congestion Avoidance approach using Huffman coding algorithm and ACO algorithm (ECA-HA). This technique focuses on resources and traffic, discovering alternate routes that are free of congestion. The forward step generates congestion-free paths from the source to the sink node, whereas the reverse step ensures successful paths from the sink to the source node. Huffman coding takes into account the packet loss rate on alternative pathways. This approach works well in tiny search spaces and can even be utilized in quickly growing networks.

Praveen et.al [28] The study suggests hybrid optimization strategies for an Energy-efficient Congestion aware Resource allocation and Routing protocol (ECRR) for IoT networks. It combines data clustering and a metaheuristic algorithm to assign large-scale IoT devices and gateways while minimizing congestion. A queue-based swarm optimization technique improves route discovery by selecting the best routes based on numerous restrictions. However, combining data clustering with metaheuristic techniques may increase computing complexity.

Majeed et.al [29] proposed the Distributed Congestion Control Protocol (DCCP), an energy-efficient method of reducing congestion and enhancing end-to-end latency. Initially, two congestion indicators are used to identify congestion. Secondly, every node compiles the data it has received and creates a map of traffic congestion. The optimal route is determined by utilizing the traffic congestion map. In the final analysis, the purpose of a rate controller is to avoid network congestion by informing a source node about the existence of congestion. Upon receiving a notification of congestion, the source node promptly modifies its transmission rate. However, the simplicity of the current topologies may limit performance, and more complex topologies could introduce additional computational overhead.

As a result, the study highlights the lack of testing in practical WSN-based IoT. The technique, which works well in small search spaces, may introduce delays, increase computational overhead, and cause complexity. However, it may also suffer from computational complexity due to data clustering and metaheuristic algorithms, and the simplicity of current topologies may limit performance. Therefore, a novel framework is necessary to avoid the congestion in the WSN.

3. Analysis of the Congestion control network

In WSNs, congestion control is crucial for maintaining efficient data transmission and prolonging network lifespan, given the limited energy resources of sensor nodes. Effective congestion management ensures optimal network performance by minimizing packet loss and reducing retransmission-related energy consumption.

3.1 Congestion Management Scheme

To improve data processing efficiency in SNs, the raw data from sensor nodes should be processed using a service computing technique. This process consists of three steps: sensing, processing, and

service. Sensor nodes collect data from the environment or item being observed, which is then analyzed by the CH node. The information is provided to end users, who subsequently access the produced data over the internet. A geographic routing-based congestion control strategy is used to reduce power dissipation while preserving the optimal path distance between nodes.

The following presumptions are taken into account when developing the WSN network model as shown in Figure 1. Both the source and the serial numbers will display a static feature. The CH provides data through a single sink. Because SNs are heterogeneous, they can be divided into three categories: regular nodes, advanced nodes, and intermediate nodes. For the sink node to perform as a super node, it must keep track of all subordinate sensor nodes' most recent information. A central sink node is assigned to gather data from different SNs and then send it to another node for additional analysis. The method being considered uses inter-data communication to make data transmission via CH easier. Nonfunctional nodes are those that have run out of battery life.

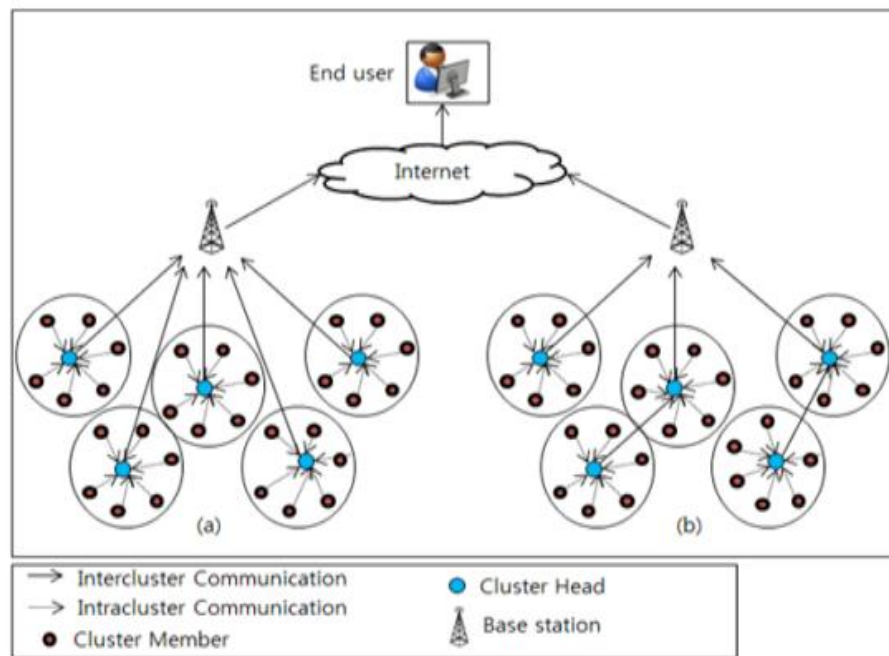


Figure 1: Communication model based on WSN clusters

The research focuses on optimizing path routing for a 5G WSN for IoT applications by utilizing DL, notably DNNs. The clustering mechanism is critical for energy-efficient delivery, network longevity, and energy savings. The clustering model is based on the (Reinforcement Learning) RL method, which assigns sensor nodes to certain clusters via the Base Station (BS) or sink node. An algorithm is utilized to determine the appropriate CH, taking into account aspects such as traffic volume, separation, power, delay, and other limitations. The Multi-Objective technique is utilized to select the optimal CH, particularly when dealing with asymmetric, shifting, dynamically untrustworthy, and changeable channel characteristics. To achieve effective data transmission, a routing strategy based on DNN is developed that takes into account residual power, distance from the CH, number of neighboring nodes, and link distance.

3.2 Recurrent Network

This work introduces the Recurrent Neural Network- Long Short-Term Memory (RNN-LSTM) model, which divides n layers into k pieces to calculate the number of compute units required for each segment at the appropriate hierarchy level in a WSN. The use of RNN-LSTM will be explored in detail in the following sections.

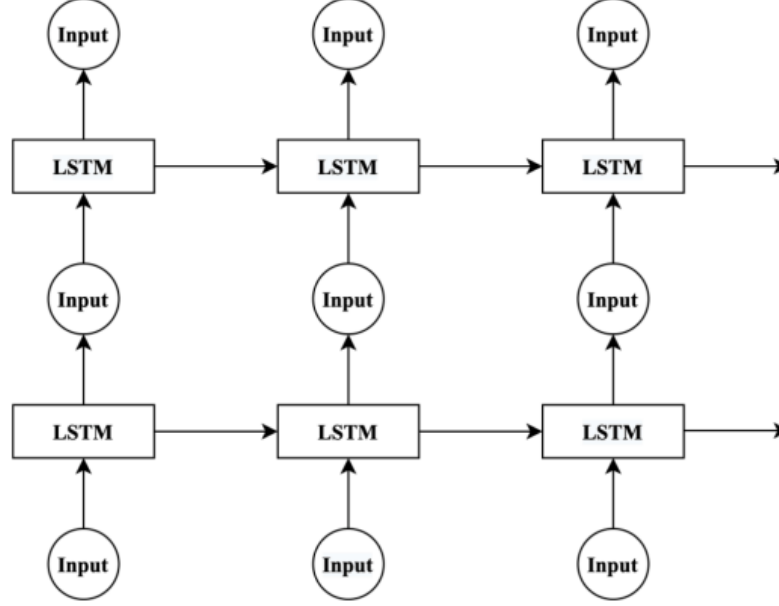


Figure 2: RNN-LSTM with three layers

The RNN-LSTM model as shown in Figure 2 is a mechanism for transforming empirical data into computational units at a specified level. It solves the vanishing gradients problem with RNN by replacing each ancestral node with a memory cell and adding a self-connected recurrent edge. The LSTM approach distinguishes memory cells from ordinary nodes and gives useful references. Adjusting weight parameters allows primary RNNs to learn and recall new information over long periods. Short-term memory is used to transfer temporary functionality between nodes. The LSTM cell's units are denoted by the symbols s and x , and the Clustering Model makes indexing a single memory cell easier. During training, the material is eventually encoded to represent generic knowledge.

The LSTM model is distinguished by its input gates, which are activated by the current data point (g_x) and the layer buried in the previous time step of the Clustering Model. The input gate v_x value rises in proportion to the input node's value. A cell's internal state, which includes linear activation, is a self-connected, continuous edge with a set unit weight. In the absence of an explosion in the Clustering Model, errors propagate over future time phases with similar weights at their edges. The vector function's internal state update equation is

$$s_x = g_x v_x + s_{x-1} \quad (1)$$

where the symbol $(\bullet)$ represents the point-wise multiplication operation. A function f_x represented by gates has been constructed, providing a method for learning about the delicate contextual features of a person's internal state, which is especially useful in networks that regularly use the Clustering Model. Equation (2) explains how to estimate the internal state during a forward pass using forget gates.

$$s_x = g_x v_x + f_x s_{x-1} \quad (2)$$

The study makes use of the Enhanced K-Means (EKM) technique, which is an improved clustering algorithm that takes into account covariances and fluctuations across variables. By prioritizing the first centroid, this method makes the clustering process more flexible and helps to avoid clustering difficulties. For example, if 100 nodes are chosen, only 10 are generated, and the rest are assigned to h clusters using the Inverted Covariance Matrix, assuring exact clustering and minimizing errors.

3.3 Energy Optimization Technique

The communication methods utilized by WSN sensors create changes in energy consumption rates. Data is sent from the source node to the BS, which is in charge of data exchange throughout the network. Packet loss and reduced data transfer efficiency occur when the source node has less residual energy. To address this issue, a cluster of trustworthy social nodes, each known as a grouped node, is proposed.

The study uses the EKM approach, an improved clustering algorithm that calculates distance using the inverse covariance matrix. This strategy makes the clustering process more flexible by taking into account covariances and fluctuations across variables. The cluster is formed by using the usual technique that prioritizes the first centroid, which can result in clustering problems. For example, if there are 100 nodes in the WSN context, only 10 are selected to form a cluster. The remaining clustering model nodes are then assigned to h clusters using the Inverted Covariance Matrix. This approach ensures precise clustering while minimizing errors in the process.

$$\bar{C}_{d(x,y)} = \sqrt{(v_n - v_x)^T C_M^{-1} (v_n - v_x)} \quad (3)$$

The distance metric based on the inverse covariance matrix is indicated by the notation $\bar{C}_{d(x,y)}$. v_n represents the set of SNs, and v_x stands for the set of group centroids. C_M^{-1} is the characteristic of the inverted covariance matrix. The SNs are assigned to the group centroid that is the closest to the centroids of every other cluster after the distance calculation. Iteratively repeating the above procedure results in the assignment of each data point, also referred to as an "SN," to its cluster centroid. The resulting clustering is represented by Equation (4)

$$C_{set} = \{C_1, C_2, \dots, C_k\} \quad (4)$$

The inscription C_k stands for the k th background cluster, and C_{set} indicates the set of groups. The DL-Cluster technique is then used to choose the CH for each group after the clusters have formed. The WSN employs the EKM technique for cluster formation, which uses the inverse covariance matrix to calculate Euclidean distances. This specific approach takes into account the interdependencies and variability of variables, which allows for greater flexibility in the clustering process.

The clustering technique groups sensor nodes into clusters using a specified number of centroids. Proper placement is critical to avoiding grouping issues. The Euclidean distance between SNs is calculated using the reversed covariance matrix, SN sets, and grouping centroids. Data points are assigned to their respective group centroids by iteratively selecting the cluster centroid that is closest to the centroids of each other group. These clusters are often known as SNs. The previously constructed groups are referred to as Set.

The study focuses on assigning CHs from the node group using logical concepts and male attraction in female reproduction. In the bowerbird attraction phase, the DL-clustering method is applied, which is based on bird stick structures. The conventional new optimization approach employs the normal distribution, which is unsuitable for large populations. Instead, the t-

distribution is utilized, which is more effective over a large range of values. The DL-clustering approach addresses ethical considerations related to the bird's existence in a series of steps.

Step 1: The first stage is to generate a random population to form a Bower Set. This population corresponds to each place in the set and is based on an optimized n-dimensional vector of parameters.

$$CN_{set} = \{(v_1, v_2, \dots, v_k)_{c_1}, (v_1, v_2, \dots, v_k)_{c_2} \dots, (v_1, v_2, \dots, v_k)_{c_k}\} \quad (5)$$

CN_{set} denotes the Bowers group.

Step 2: Male bird success in attracting mates is mostly determined by producing an appealing bowler's likelihood, whereas female bower birds select a bower based on the clustering Model's likelihood.

$$p = \frac{fn_{CH}(k)}{\sum_{k=0}^{N-1} fn_{CH}(k)} \quad (6)$$

Equation (7) expresses the maximum residual energy, which is considered the fitness of each solution.

$$fn_{CH}(k) = \{\max (E_f(R)_M)\} \quad (7)$$

The fitness function that was used to choose CH is indicated by the notation $fn_{CH}(k)$, and the remaining energy of the N remedies is represented by the symbol $E_f(R)_M$.

Step 3: The Bower Location algorithm updates each solution depending on its fitness value, with the best-fitting solution being considered elite. Equation (8) shows how the program records the alteration of each bird's nest every time it is utilized.

$$v_n(x+1) = v_n(x) + t_n \left(\frac{v_{sN} - v_{EN}}{2} \right) - v_n(x) \quad (8)$$

$$t_n = \frac{w}{1+p} \quad (9)$$

The maximum step size (w) at which the likelihood (p) of the target location drops to zero is indicated by the symbol. When the step size is half the width and the probability of the target location equals 1, the minimum step size occurs.

Step 4: The Bower Location algorithm revises answers based on fitness value, with the best-fitting solution designated elite. Equation (8) shows how the application records nest changes each time it is invoked.

$$v_{NM}(x+1) = T(v_{NM}(x), \alpha^2) \quad (10)$$

$$T(v_{NM}(x), \alpha^2) = \frac{v_{NM}(x) - P}{\alpha/\sqrt{M}} \quad (11)$$

$$\alpha = \beta(B_{max} - B_{min}) \quad (12)$$

The maximum limit is indicated by the notation B_{max} , and the minimum limit is indicated by B_{min} .

Step 5: In this phase, each cycle's current population levels are examined both before and after the modifications. New individuals are created by gathering and classifying the two aforementioned populations according to their degree of fitness. This method's steps 3 and 4 are carried out repeatedly until the termination requirements are satisfied.

The following are the procedures for choosing a CH:

Step 1: A portion of the bower set is reflected in a random population. An n-dimensional vector of variables that need to be optimized is connected to each position.

Step 2: Using each member of the population's fitness values, the probability (p) of each is determined.

Step 3: After each iteration, a mutation process takes place in which random modifications are applied with a predefined probability. The fitness function and the target distribution for mutation are indicated by equations (10) and (11), respectively. The overall flowchart for the proposed model is shown in Figure 3.

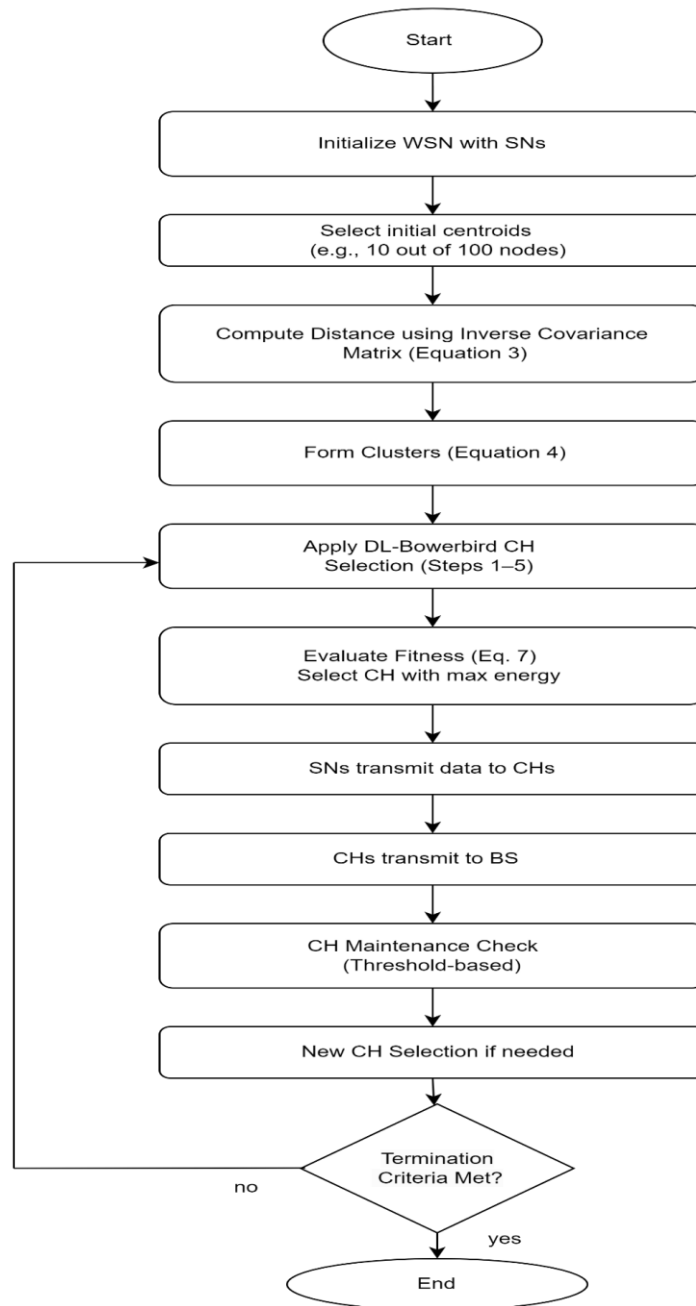


Figure 3: Flowchart for the proposed model

The DL-clustering process selects CHs to collect data from SNs and transmit it to BS. The CH with the maximum residual energy is known as the "cluster node." Following the selection procedure, SNs transfer data packets to their targeted locations via CH nodes. Maintenance of the CH is critical for energy-efficient information transfer since CHs are prone to energy loss across several data transfer cycles. The energy efficiency period of nodes is taken into account while picking a new CH. When the CH's energy level falls below a predefined threshold, a new CH is selected, allowing the CH to continue transmitting data packets. This practice is sometimes referred to as CH maintenance.

4. PERFORMANCE EVALUATION

This paper compares a new strategy for WSN clustering to established methods such as LEACH [30], TCEER [31], TASRP [32], CARA [33], and SACC-Analytical Hierarchy Process (AHP) [31]. LEACH is a pioneering method, however it overlooks security. SACC selects CHs using the AHP approach, whereas TCEER isolates hostile nodes and ensures safe transmission with a trust model. TASRP implements both security and clustering while avoiding congestion conditions. CARA is utilized for performance evaluation. The DLC approach exhibits higher energy efficiency throughout the duration, suggesting an increased capability for energy optimization. This study demonstrates the efficacy of advanced deep-learning approaches and intelligent grouping strategies in increasing energy efficiency in WSNs during data transmission.

4.1 Assumptions

Outlines several presumptions and the network model's construction to justify and explain the suggested protocol. These are necessary because WSNs are limited in terms of power supply, computing power, and buffer storage.

- ♣ Each node has a unique ID and location.
 - ♣ The propagation channel is symmetric. Sensor nodes are energy-constrained due to battery operation.
- Sensor nodes include both source and intermediary nodes, excluding sink nodes.
- ♣ Each node is vulnerable to assaults in the same way.
 - ♣ The BS is stationary and far away from the sensor node.
 - ♣ The BS has no resource limits.
 - ♣ Nodes within the r -meter of the BS can communicate directly with it.
 - ♣ CHs track each Cluster member's ID, location, and remaining energy. The most important SNs inside a cluster are known as CHs. The CHs send their combined data to the BS.

4.2 Configuration of the Network

MATLAB software version 2020a has been used for simulation. 100 randomly distributed nodes with mobility features have been placed in a $200 \times 200 \text{ m}^2$ network for simulation purposes. The mobility speeds at which the experiments were carried out ranged from 5 to 20 m/s. Additionally, Table 1 displays all required parameters along with their values for the simulation. It simulated with about 2000 rounds. The results are also displayed in the figure. The suggested method's performance has been assessed by contrasting it with the LEACH [30], TCEER [31], TASRP [32], CARA [33], and SACC-AHP [31]. The energy efficiency, PDR, throughput, network lifetime, and other factors of these algorithms have been compared.

4.3 Results

A thorough evaluation of the suggested method's performance was conducted, encompassing all of the critical network metrics such as throughput, energy consumption, and network lifetime.

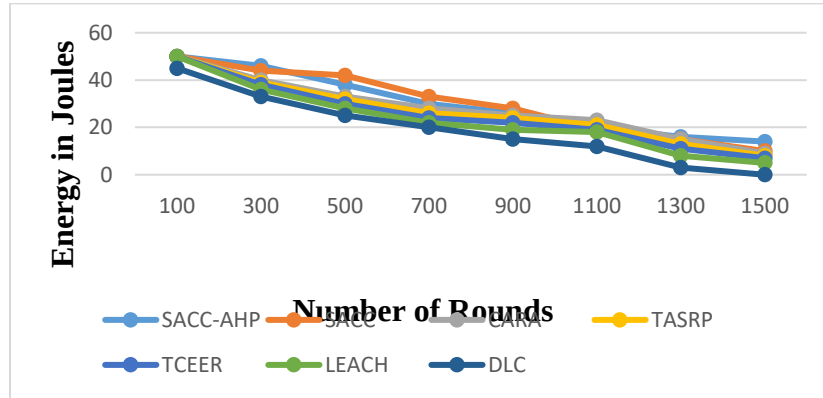


Figure 4: Energy consumption analysis

The graph highlights that the DLC algorithm demonstrates superior energy efficiency compared to other techniques, including SACC-AHP, SACC, CARA, TASRP, TCEER, and LEACH as shown in Figure 4. Over the rounds, DLC consistently shows lower energy consumption, indicating more effective management of energy resources during communication processes. This improved efficiency is attributed to DLC's optimized approach in selecting CHs and managing node communication, which minimizes energy wastage. DLC's energy consumption remains lower due to its strategic mechanisms for minimizing unnecessary energy expenditure, such as efficient CH selection and effective data transmission protocols. Although SACC-AHP also exhibits strong performance in energy efficiency, DLC closely follows with a notable reduction in energy consumption, demonstrating its capability to optimize resource utilization and prolong the lifespan of sensor nodes.

The proposed DLC method achieves 99.9% energy efficiency, validated through simulations illustrated in Figure 4. Over 1500 rounds, DLC maintained higher residual energy levels compared to benchmark models such as SACC, LEACH, and CARA. This exceptional performance stems from the combined use of EKM clustering and the Bowerbird-inspired CH selection mechanism, which emphasizes residual energy and adaptive mutation. To replicate this, researchers should employ a WSN with 100 nodes, each initialized with 50 Joules, using a standard first-order energy model. Simulation can be performed in MATLAB or NS-2, tracking residual energy across rounds. This ensures the method's robustness and reproducibility under varying network dynamics.

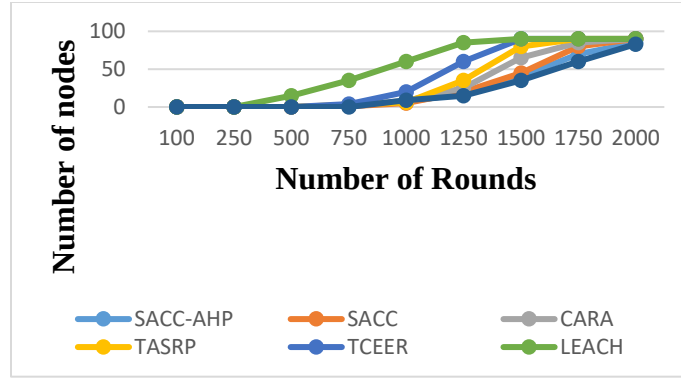


Figure 5: Network Lifetime Analysis

The graph demonstrates that the DLC algorithm provides a notable improvement in network lifetime for WSNs compared to other techniques as shown in Figure 5. Initially, all algorithms maintain a steady number of operational nodes, indicating similar energy efficiency. However, from around 750 rounds, LEACH and TCEER begin to exhibit a rapid decline in operational nodes, reflecting their lower energy efficiency. In contrast, the DLC algorithm maintains a higher number of operational nodes throughout the middle phase, showing superior energy management. By the later phase, DLC performs exceptionally well, closely following the SACC-AHP algorithm but with slightly fewer operational nodes. This indicates that while SACC-AHP leads, DLC also significantly extends the network lifetime and demonstrates effective energy conservation. LEACH and TCEER show the shortest network lifetimes, with LEACH nearing zero operational nodes by 1750 rounds. This analysis underscores that the DLC algorithm not only enhances network lifetime but also offers a more efficient energy management solution compared to other existing techniques.

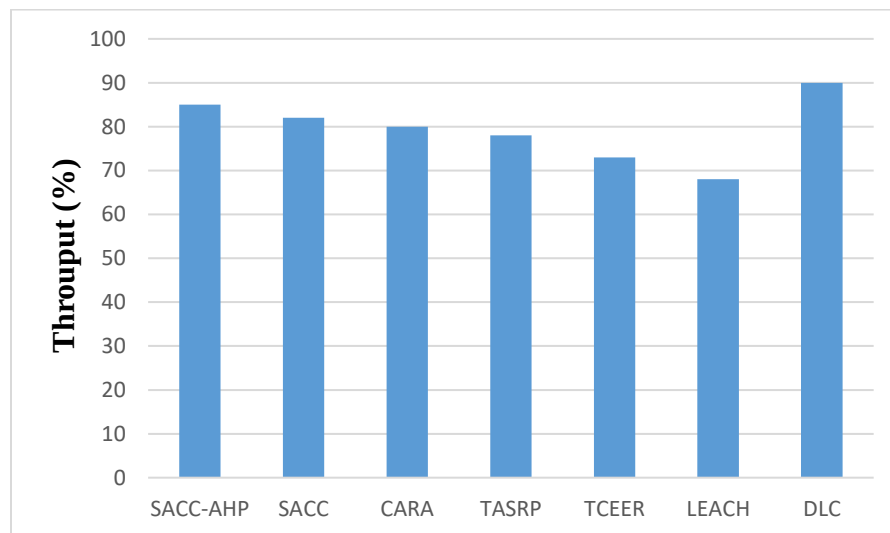


Figure 6: Throughput analysis

The throughput analysis presented in Figure 6 illustrates that the DLC algorithm achieves a notable throughput, outperforming other techniques, including SACC-AHP, TCEER, TASRP,

CARA, and LEACH. DLC's ability to maintain high throughput is attributed to its robust mechanism for identifying and mitigating the impact of malicious nodes, ensuring they do not adversely affect data transmission efficiency. In contrast, SACC-AHP, while effective, does not achieve the same level of throughput as DLC. Additionally, techniques like TCEER, TASRP, CARA, and LEACH exhibit lower throughput and PDR, likely due to their inadequate consideration of WSN scenarios. This analysis underscores the DLC algorithm's superior performance in sustaining high throughput and effective data transmission across the network.

DLC demonstrates lower energy consumption and superior energy management, attributed to its optimized CH selection and effective communication protocols, which extend the network's operational lifetime. It maintains a higher number of operational nodes throughout the rounds, indicating better energy conservation and network longevity compared to other methods, especially LEACH and TCEER, which exhibit a rapid decline in node functionality. Additionally, DLC achieves notable throughput by effectively mitigating the impact of malicious nodes and selecting relay nodes based on key criteria, thus enhancing data transmission efficiency. This contrasts with other techniques that show lower throughput and less effective energy management. Overall, DLC's ability to optimize both energy use and data transmission highlights its superior performance and efficiency in WSNs.

5. CONCLUSION

The article describes a DLC model for optimizing energy utilization in WSNs by improving cluster formation, CH selection, and CH maintenance. This model dramatically improves energy efficiency and increases the network's operating life. It routinely beats established approaches such as LEACH, TCEER, TASRP, CARA, and SACC in terms of energy efficiency and throughput. DLC's strategic procedures, including effective CH selection and resilient data transmission protocols, lead to lower energy usage and increased throughput. This optimized approach ensures that sensor nodes last longer and transmit data more efficiently. Future work will concentrate on improving the DLC algorithm, incorporating new deep-learning models, investigating adaptive mechanisms, and broadening its ability to handle a variety of WSN settings. The promising results demonstrate the potential of sophisticated deep-learning approaches for energy optimization in WSNs, paving the path for more efficient and resilient SNs.

REFERENCES

- [1]. Nourildean, S.W., Hassib, M.D., & Mohammed, Y.A. (2022). Internet of things based wireless sensor network: a review. *Indonesia. J. Electr. Eng. Comput. Sci*, 27(1), 246-261.
- [2]. Grover, A., Kumar, R.M., Angurala, M., Singh, M., Sheetal, A., & Maheswar, R. (2022). Rate aware congestion control mechanism for wireless sensor networks. *Alexandria Engineering Journal*, 61(6), 4765-4777.
- [3]. Pandey, D., & Kushwaha, V. (2020). An exploratory study of congestion control techniques in wireless sensor networks. *Computer Communications*, 157, 257-283.
- [4]. Yadav, S.L., & Ujjwal, R.L. (2021). Mitigating congestion in wireless sensor networks through clustering and queue assistance: a survey. *Journal of Intelligent Manufacturing*, 32(8), 2083-2098.
- [5]. Khan, M.U.G., Elhadeif, M., & Mehmood, A. (2022). Intelligent Urban Cities: Optimal Path Selection Based on Ad Hoc Network. *IEEE Access*, 11, 19259-19268.
- [6]. Alshaer, H., & Haas, H. (2020). Software-defined networking-enabled heterogeneous wireless networks and applications convergence. *IEEE Access*, 8, 66672-66692.

- [7]. Bagais, N., Fadel, E., & Al-Mansour, A. (2022). An Efficient Path Planning Strategy in Mobile Sink Wireless Sensor Networks. *Computers, Materials & Continua*, 73(1).
- [8]. Maheshwari, A., & Yadav, R.K. (2020). Analysis of congestion control mechanism for iot. In *2020 10th international conference on cloud computing, data science & engineering (Confluence)*, 288-293.
- [9]. Khan, A.N., Tariq, M.A., Asim, M., Maamar, Z., & Baker, T. (2021). Congestion avoidance in wireless sensor network using software-defined network. *Computing*, 103, 2573-2596.
- [10]. Shah, S.A., Nazir, B., & Khan, I.A. (2017). Congestion control algorithms in wireless sensor networks: Trends and opportunities. *Journal of King Saud University-Computer and Information Sciences*, 29(3), 236-245.
- [11]. Jadhav, S., & Jadhav, S. (2021). An organized study of congestion control approaches in wireless sensor networks. In *Future Trends in 5G and 6G*, 1-23.
- [12]. Homaei, M.H., Soleimani, F., Shamshirband, S., Mosavi, A., Nabipour, N., & Varkonyi-Koczy, A.R. (2020). An enhanced distributed congestion control method for classical 6LoWPAN protocols using a fuzzy decision system. *IEEE Access*, 8, 20628-20645.
- [13]. Li, S., Xu, Q., Gaber, J., Dou, Z., & Chen, J. (2020). Congestion control mechanism based on dual threshold DI-RED for WSNs. *Wireless personal communications*, 115, 2171-2195.
- [14]. Bohloulzadeh, A., & Rajaei, M. (2020). A survey on congestion control protocols in wireless sensor networks. *International Journal of Wireless Information Networks*, 27, 365-384.
- [15]. Ganesan, S., & Muthuswamy, V. (2022). An Enhanced Packet Transmission Framework for Handling Real-Time Burst Traffic in Wireless Sensor Networks.
- [16]. Gao, Q., Li, J., Liu, Y., & Xing, Y. (2023). Optimal control method for congestion control and delay reduction in deterministic networks. *IEEE Access*.
- [17]. Achroufene, A., Chelik, M., & Bouadem, N. (2021). Modified CSMA/CA protocol for real-time data fusion applications based on clustered WSN. *Computer Networks*, 196, 108243.
- [18]. Paranjothi, A., Khan, M. S., & Zeadally, S. (2020). A survey on congestion detection and control in connected vehicles. *Ad Hoc Networks*, 108, 102277.
- [19]. Mahajan, M., & Kaur, S. (2020). Congestion control protocols in wireless sensor networks: a comprehensive Survey. In *2020 International Conference on Intelligent Engineering and Management (ICIEM)*, 160-164.
- [20]. Putti, M., Lonardi, A., & De Bacco, C. Developing new methods for routing and optimal transport on networks.
- [21]. Arya, G., Bagwari, A., & Chauhan, D.S. (2022). Performance analysis of deep learning-based routing protocol for efficient data transmission in 5G WSN communication. *IEEE Access*, 10, 9340-9356.
- [22]. Adil, M., Khan, R., Ali, J., Roh, B.H., Ta, Q.T.H., & Almaiah, M.A. (2020). An energy-proficient load-balancing routing scheme for wireless sensor networks to maximize their lifespan in an operational environment. *Ieee Access*, 8, 163209-163224.
- [23]. Amutha, J., Sharma, S., & Nagar, J. (2020). WSN strategies based on sensors, deployment, sensing models, coverage and energy efficiency: Review, approaches and open issues. *Wireless Personal Communications*, 111(2), 1089-1115.
- [24]. Bekal, P., Kumar, P., Mane, P.R., & Prabhu, G. (2023). A comprehensive review of energy efficient routing protocols for query-driven wireless sensor networks. *F1000Research*, 12.

- [25]. Kavitha, T., Pandeewari, N., Shobana, R., Vinothini, V.R., Sakthisudhan, K., Jeyam, A., & Malar, A.J.G. (2022). Data congestion control framework in Wireless Sensor Networks in IoT-enabled intelligent transportation system. *Measurement: Sensors*, 24, 100563.
- [26]. Srivastava, V., Tripathi, S., Singh, K., & Son, L.H. (2020). Energy efficient optimized rate-based congestion control routing in a wireless sensor network. *Journal of Ambient Intelligence and Humanized Computing*, 11, 1325-1338.
- [27]. Yadav, S. L., Ujjwal, R. L., Kumar, S., Kaiwartya, O., Kumar, M., & Kashyap, P. K. (2021). Traffic and energy-aware optimization for congestion control in next-generation wireless sensor networks. *Journal of Sensors*, 2021(1), 5575802.
- [28]. Praveen, K.V., & Prathap, P.J. (2021). Energy efficient congestion aware resource allocation and routing protocol for IoT network using hybrid optimization techniques. *Wireless Personal Communications*, 117(2), 1187-1207.
- [29]. Majeed, U., Malik, A.N., Abbas, N., & Abbass, W. (2022). An energy-efficient distributed congestion control protocol for wireless multimedia sensor networks. *Electronics*, 11(20), 3265.
- [30]. Bharany, S., Sharma, S., Badotra, S., Khalaf, O.I., Alotaibi, Y., Alghamdi, S., & Alassery, F. (2021). Energy-efficient clustering scheme for flying ad-hoc networks using an optimized LEACH protocol. *Energies*, 14(19), 6016.
- [31]. Pandey, D., & Kushwaha, V. (2023). The use of Analytical Hierarchy Process in sensor-based networks for security-aware congestion control. *Networks & Heterogeneous Media*, 18(1).
- [32]. Khan, T., & Singh, K. (2021). TASRP: a trust-aware secure routing protocol for wireless sensor networks. *International Journal of Innovative Computing and Applications*, 12(2-3), 108-122.
- [33]. Yan, J., & Qi, B. (2021). CARA: a congestion-aware routing algorithm for wireless sensor networks. *Algorithms*, 14(7), 199.